



Connecting Intermec Printers to Windows 7 via USB


The following instructions are for all DPAS supported Intermec printers.

The Intermec InterDriver EasyCoder PD42 (203 dpi) - IPL driver has been tested and recommended for DPAS use. This driver will support all Intermec printers approved by DPAS.

Please visit the **Support > Software and Hardware** section of the [DPAS Support Web Site](http://www.dpas.gov/Support/SoftwareandHardware.aspx) for a listing of approved DPAS printers.

Downloading Driver Files

1. In your browser, navigate to <http://tinyurl.com/6qq8bc9>
2. Choose **Run**.

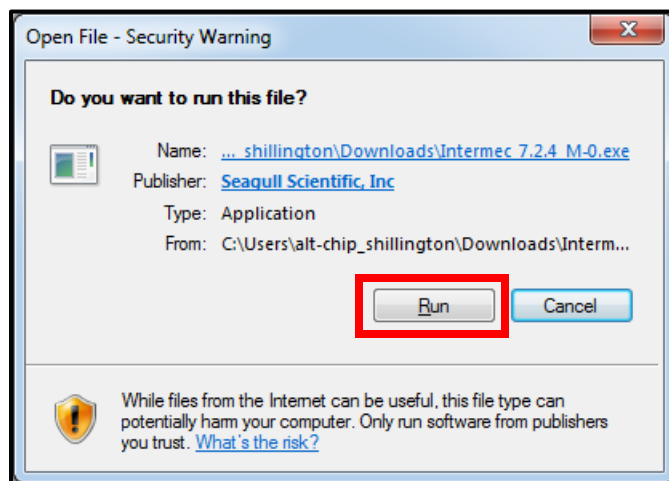

3. If you receive a security warning, click **Run**.




4. Select the **I accept the terms in the license agreement** radio button and choose the **Next** button.

A screenshot of a software installation window titled "Intermec InterDriver 7". The window contains a "License Agreement" section with the following text: "Please read the following license agreement carefully." Below this is a scrollable text area titled "INTERMEC END USER LICENSE AGREEMENT". The text in the scroll area reads: "Important: Carefully read this End User License Agreement (EULA) before installing or using the Software. You may use the Software only if You agree to be bound by the terms of this EULA. If You do not agree to the terms of this EULA, You may NOT use the Software and You MUST return the Software and/or the equipment on which it is installed to Intermec for a refund. ANY INSTALLATION OR USE OF THE SOFTWARE INDICATES YOUR AGREEMENT TO BE BOUND BY THE TERMS AND CONDITIONS OF THIS EULA." Below the scroll area are two radio buttons: "I accept the terms in the license agreement" (which is selected and highlighted with a red box) and "I do not accept the terms in the license agreement". At the bottom of the window are three buttons: "< Back", "Next >" (highlighted with a red box), and "Cancel".




5. Leave the **Installation Directory** at its default and select the **Next** button.

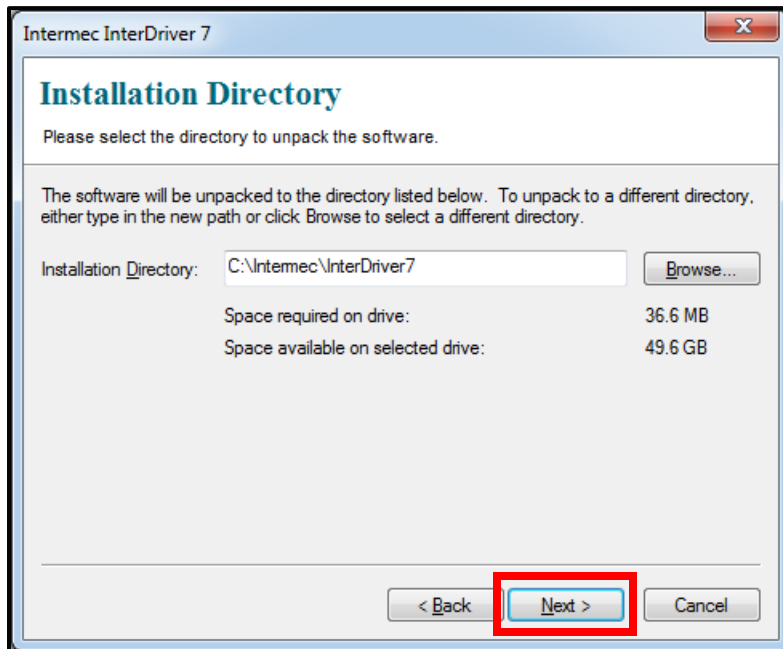



6. Deselect the **Read installation instructions** checkbox and choose the **Finish** button.

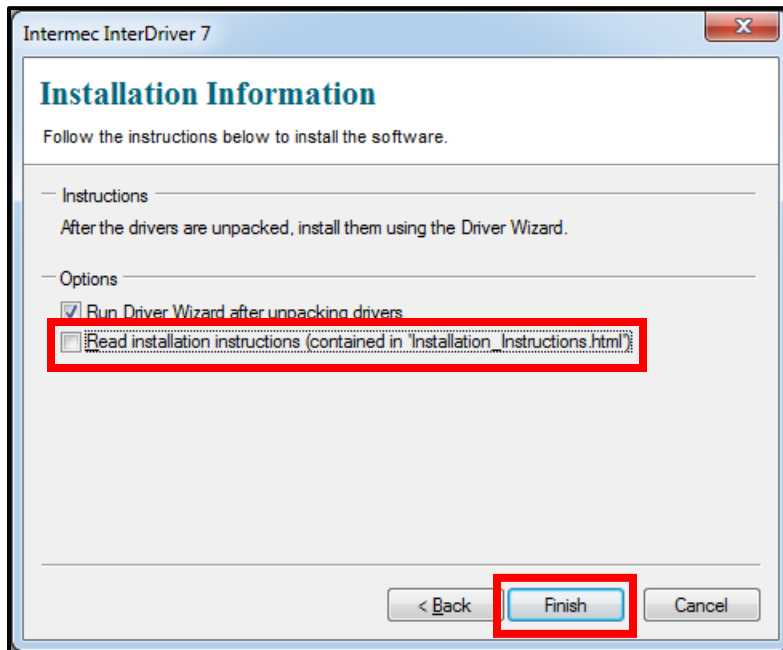


7. Once all files are installed, the **Seagull Driver Wizard** will display.



Installing using the Seagull Driver Wizard


If you are not continuing from the initial download of the InterDriver, navigate to C:\Intermec\InterDriver7 and launch DriverWizard.exe.

1. Select **Install Print Drivers** radio button and choose the **Next** button.

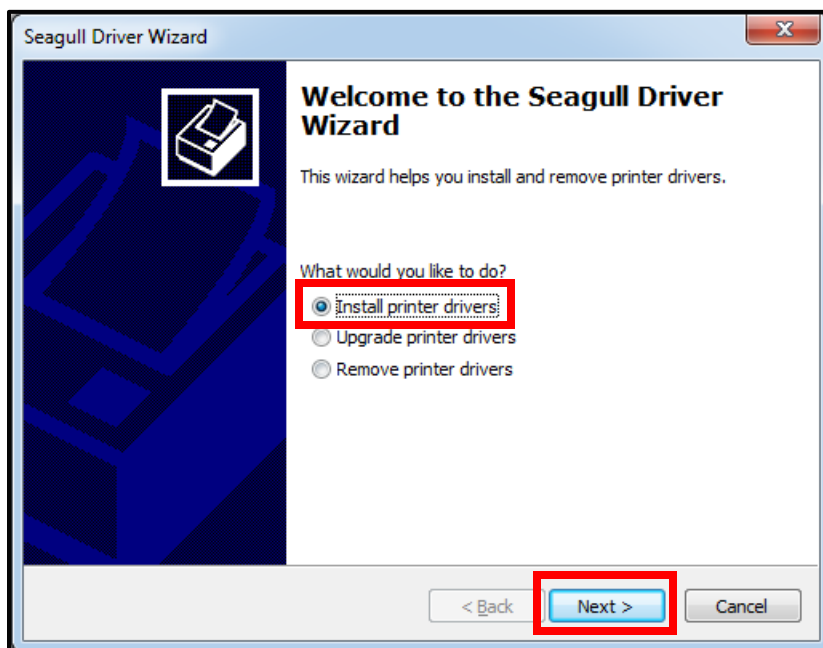




2. Select **EasyCoder PD42 (203 dpi) – IPL** from the **Printer Model** and choose the **Next** button.

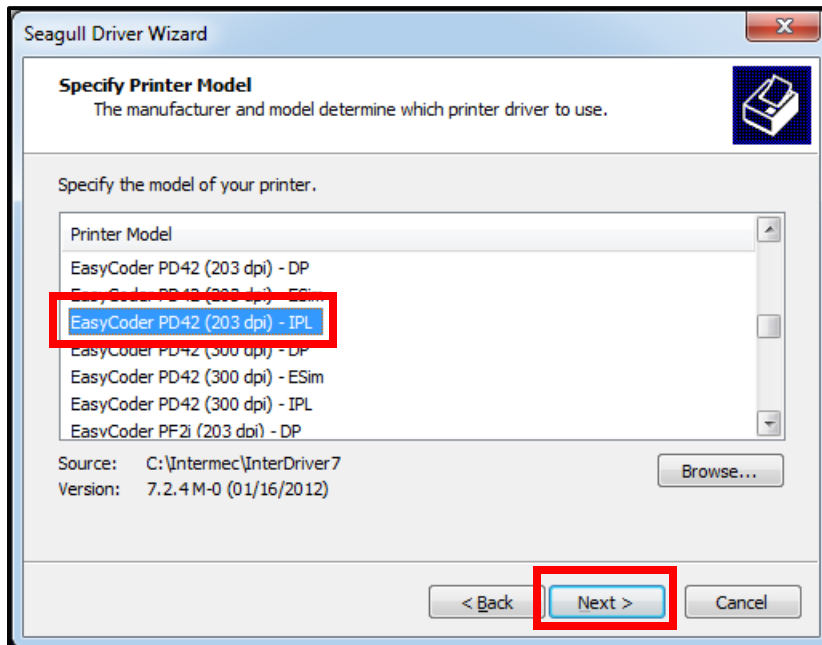




3. Select the USB port the printer is connected to (usually USB001) and choose the **Next** button.

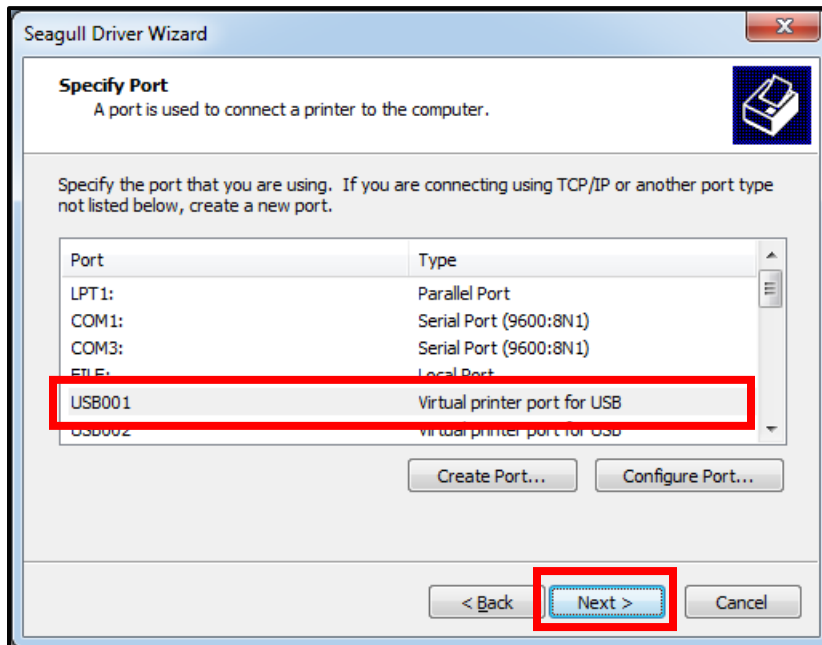




4. Enter a meaningful printer name or leave the default and select the **Next** button.

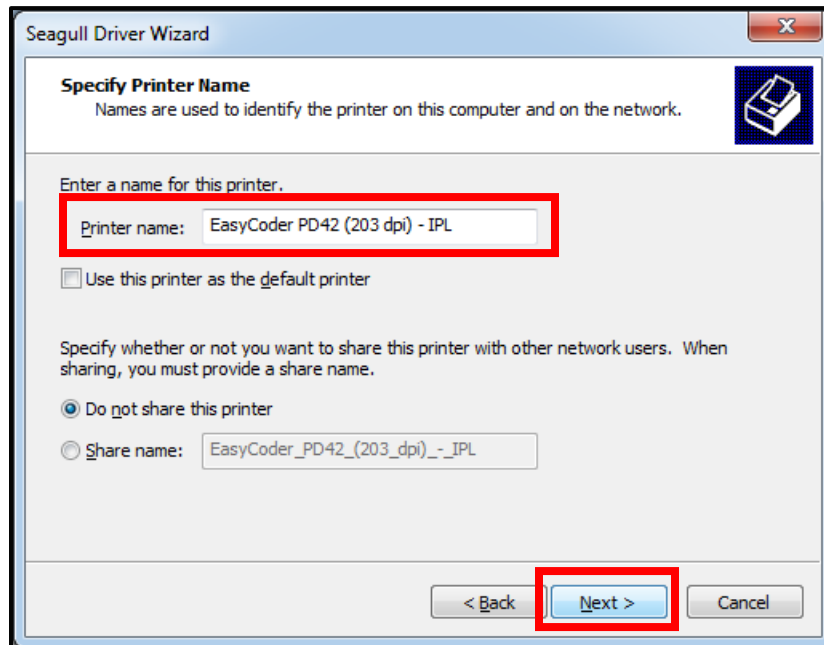

5. The drivers install.




6. Select the **Finish** button.

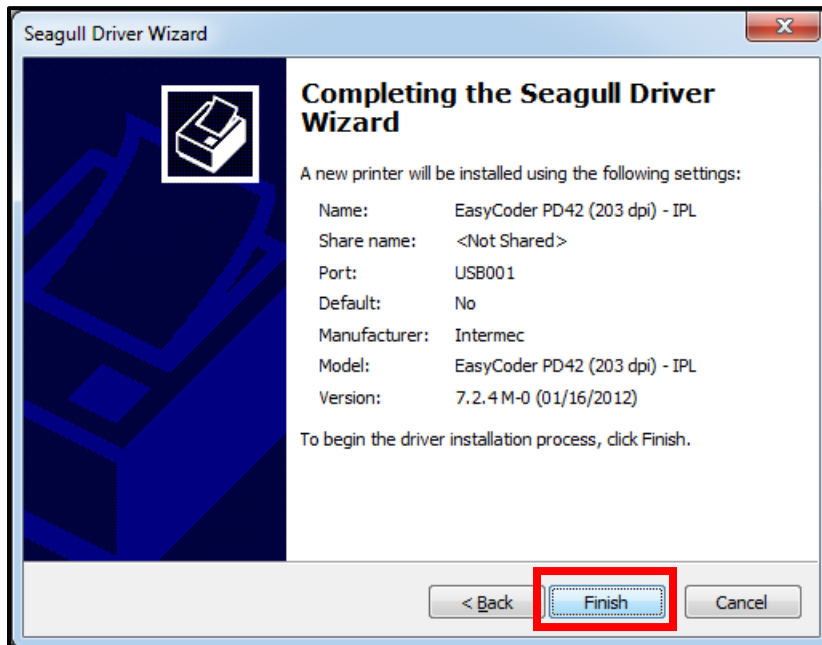




7. The driver installs.

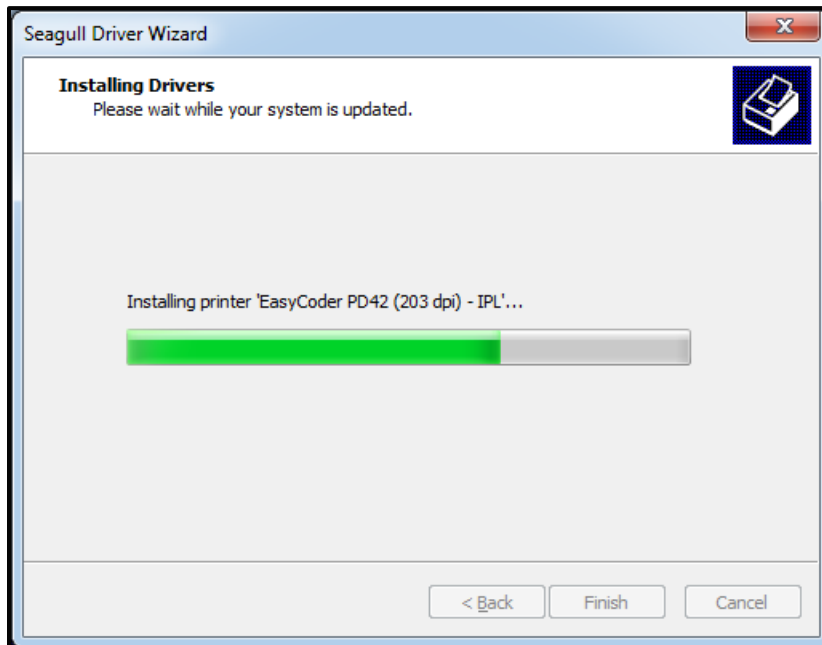




8. Select the Close button.

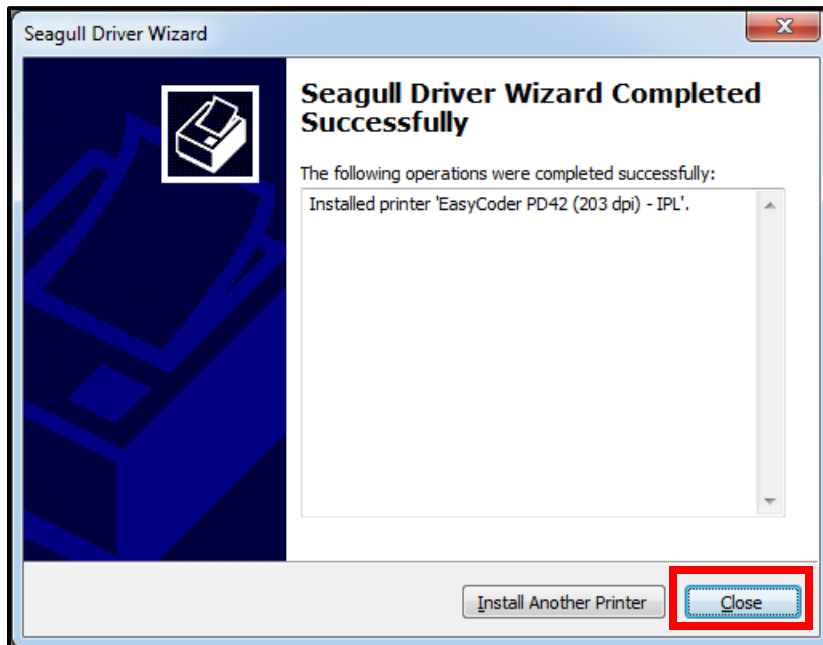




Configuring the Intermec InterDriver

1. Go to **Start > Printers and Faxes**.
2. Right-click on the printer name entered in the "Installing using the Seagull Driver Wizard" section and select **Printer properties**.

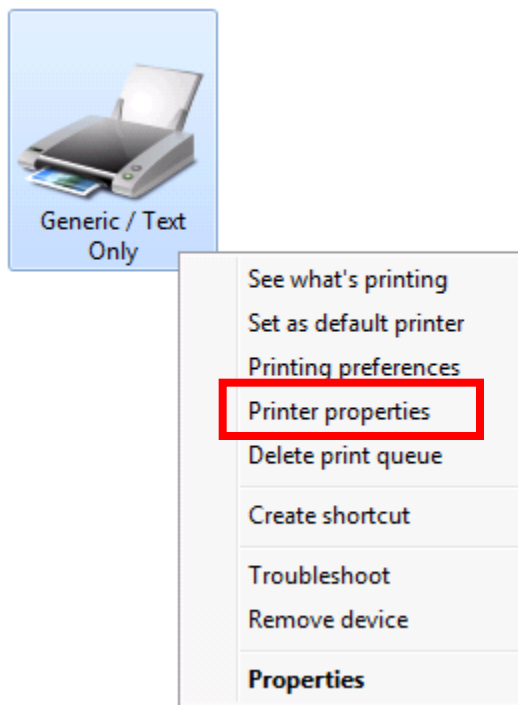




3. Select the **Preferences...** button at the bottom of the **General** tab.

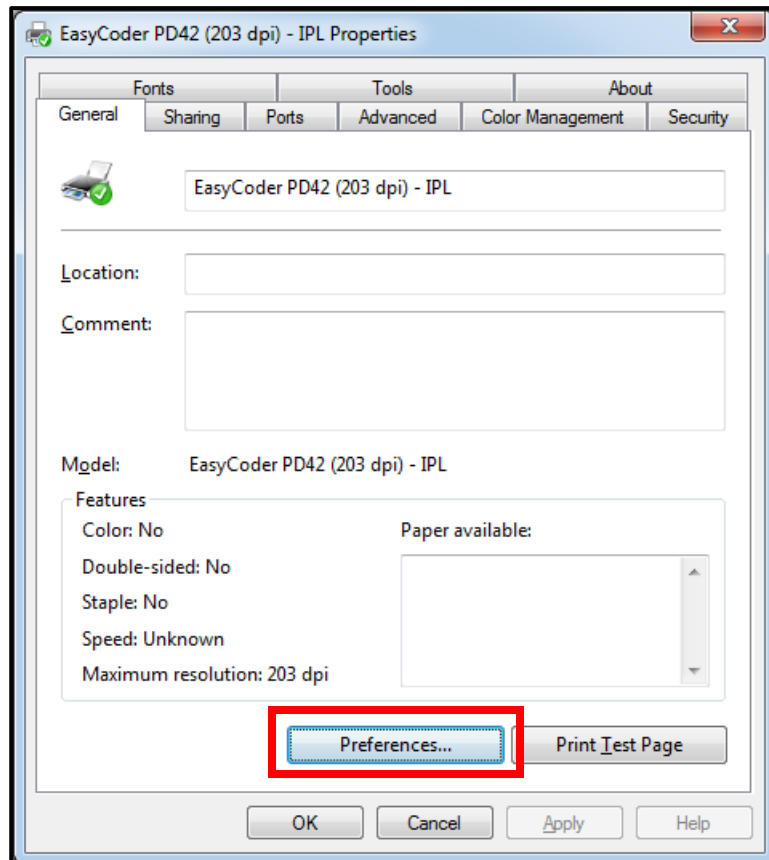




4. Select the **Advanced Options...** button on the **Page Setup** tab.

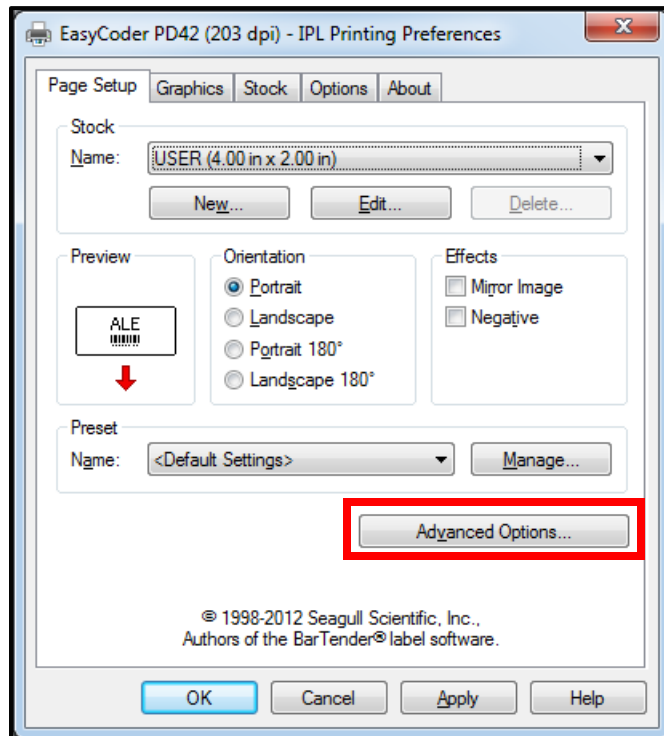



5. Select the **Passthrough** tab.
6. Select the **Enable "Generic/Text Only" mode** checkbox and choose the **OK** button.

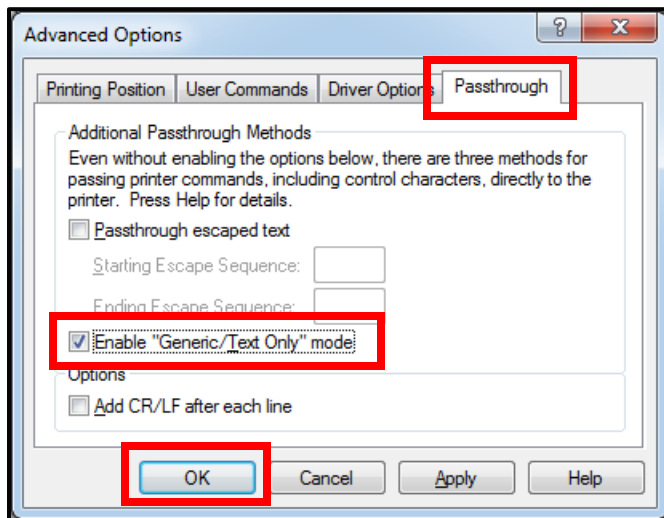


7. Select the **OK** button on the next two dialog boxes to complete the process.




Configuring Internet Explorer

1. Login to DPAS.
2. Navigate to **AIT > Print Labels**.
3. *****IMPORTANT***** Print a label from Web DPAS.
4. Select the **Print Menu** at the top of Internet Explorer.
5. Select **Page Setup**.

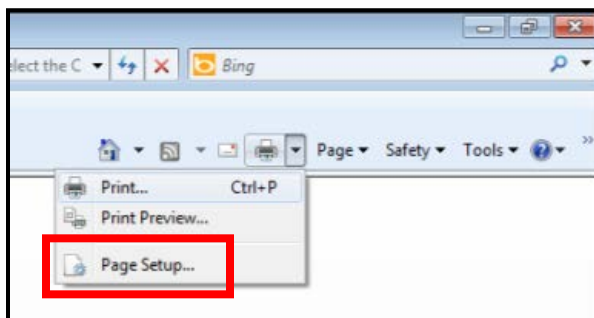



6. Verify the **Page Size** is set to *User defined*.
7. Verify the **Orientation** is set to *Portrait*.
8. Uncheck the **Enable Shrink-to-Fit** checkbox.
9. Change the **Left, Right, Top** and **Bottom** Margin settings to *0*. Margins may adjust after the **OK** button is selected.
10. Change all **Header** and **Footer** fields to *-Empty-*.
11. Select **OK** on the **Page Setup** dialog box.

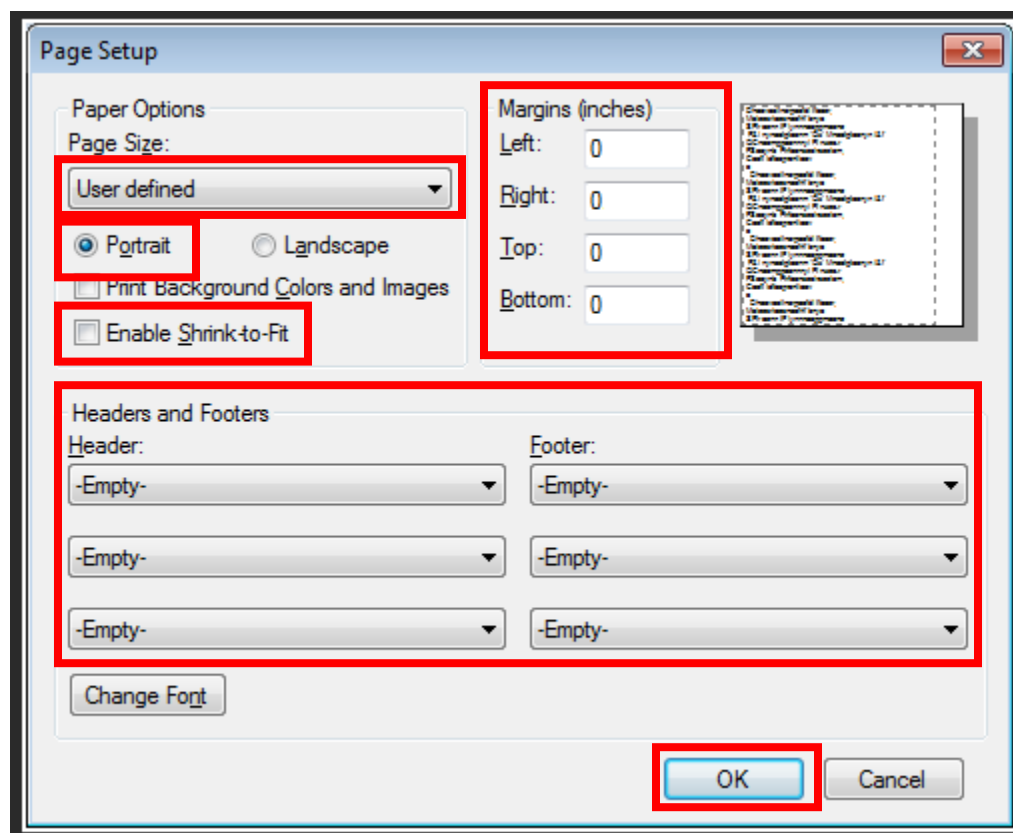

12. You are now ready to print labels.